



FUEL STABILIZER


Treats up to 35 gallons of fuel. Super concentrated formula for all two and four-cycle engines. Keeps stored fuel fresh. Compatible with all gasolines, fuel/oil mixtures, gasohol, oxygenated fuel, kerosene, and diesel fuels. Contains no alcohol. This diesel fuel additive complies with the federal low-sulfur content requirements for use in diesel motor vehicles and non-road engines. For storage and everyday use in cars, trucks, recreational vehicles, motorcycles, snowmobiles, marine engines, lawn mowers, chain saws, snow blowers, generators, gas, cans, fuel storage tanks, etc.

APPLICATION:

- Treats 35 gallons!
- Keeps stored fuels fresh for easier starts
- Helps keep entire fuel system clean
- Removes water to prevent corrosion
- For all two and four-cycle engines

DIRECTION:

Loosen the cap and pre-measure 1 ounce of product for each 2.5 gallons of fuel to be treated. Hold the bottle upright and squeeze until the small chamber fills. After treatment, run the engine for a few minutes to allow treated fuel to flow throughout fuel system. Avoid contact with painted surfaces. In case of paint contact, wash off with water immediately.

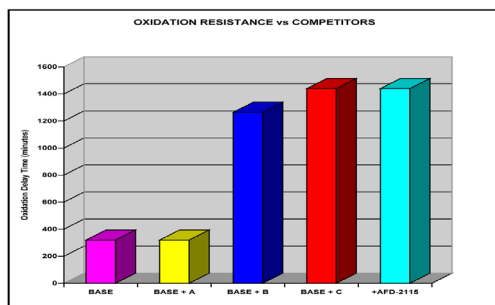

HEALTH & SAFETY, ENVIRONMENT:

Prolonged and repeated contact with oil may cause skin disorders. Avoid contact. Wash immediately with soap and water. Do not discharge used oil in to drains or the environment. Dispose to an authorized used oil collection point. For further information on Safety Guidelines please refer to MSDS available on our website www.lubrex.net

HEALTH & SAFETY:

This product is not likely to present any significant health or safety hazards when properly used in the recommended application and good standards of personal hygiene are maintained. Reference is made to the Safety Data Sheet (SDS) which is available on request via your local sales office or via the internet www.lubrex.net

PROTECT THE ENVIRONMENT:

Take used oil to an authorized collection point. Comply with local regulation. Do not discharge into drains, soil or water.

STORAGE:

We recommend to store all packages under cover. In case outside storage is unavoidable, drums should be laid horizontally to avoid the possible ingress of water and damage to drum markings. Products should never be stored above 60°C, exposed to hot sun or freezing conditions.

[™]Trademark of LUBREX, registered in various countries © 2005

All statements, information and data presented herein are believed to be accurate and reliable, but are not to be taken as a guarantee, an express warranty or an implied warranty of merchantability or fitness for a particular purpose, or representation, express or implied, for which LUBREX and its affiliates assume legal responsibility.